



ONTRUCK INDIA
EQUIPMENT PRIVATE LTD

HYE BOOM LIFT 320

AERIAL PLATFORM



Building No. 22, J. K. Industrial
Park, Dhamatvan, Ahmedabad,
Gujarat, India
PIN Code: 382435



Main Performance Parameters


S. No	Specification	Unit	Value
1	Working Platform Load Rating	kg	200
2	Maximum Operating Height	m	32
3	Maximum Operating Range	m	18
4	Outrigger Span (Transverse)	mm	6250
5	Outrigger Span (Longitudinal)	mm	5300
6	Work Platform Rotation	°	360
7	Arm Amplitude Change Time	s	≥60
8	Arm Extension Time	s	≥120
9	Arm Rotation Speed	s/r	≥60
10	Outrigger Extension/Retraction Time	s	≥60

Configuration & Description

S.No	Component	Description
1	Engine / Cabin	Single row cab, 3 passengers, equipped with air conditioning.
2	Fence and Walkway	Stainless steel fence and aluminum alloy anti-slip walkway.
3	Power Take-Off System	Pneumatic power take-off.
4	Working Platform	1800 × 700 × 1100 mm platform (customizable).
5	Arm Structure	Eight-section 16-sided synchronous telescopic arm.
6	Rotation Device	360° continuous rotation.
7	Outriggers	X-type outriggers, individually adjustable and synchronously extendable.
8	Operate & Emergency device	Fixed operation of the turntable, wireless remote control box operation, hydraulic handle operation of the vehicle, equipped with an electric emergency pump, the entire vehicle can achieve full hydraulic electric emergency operation.
9	Control System	CBR aerial vehicle control system with high stability.
10	Leveling System	Hydraulic automatic leveling.



ONTRUCK INDIA
EQUIPMENT PRIVATE LTD

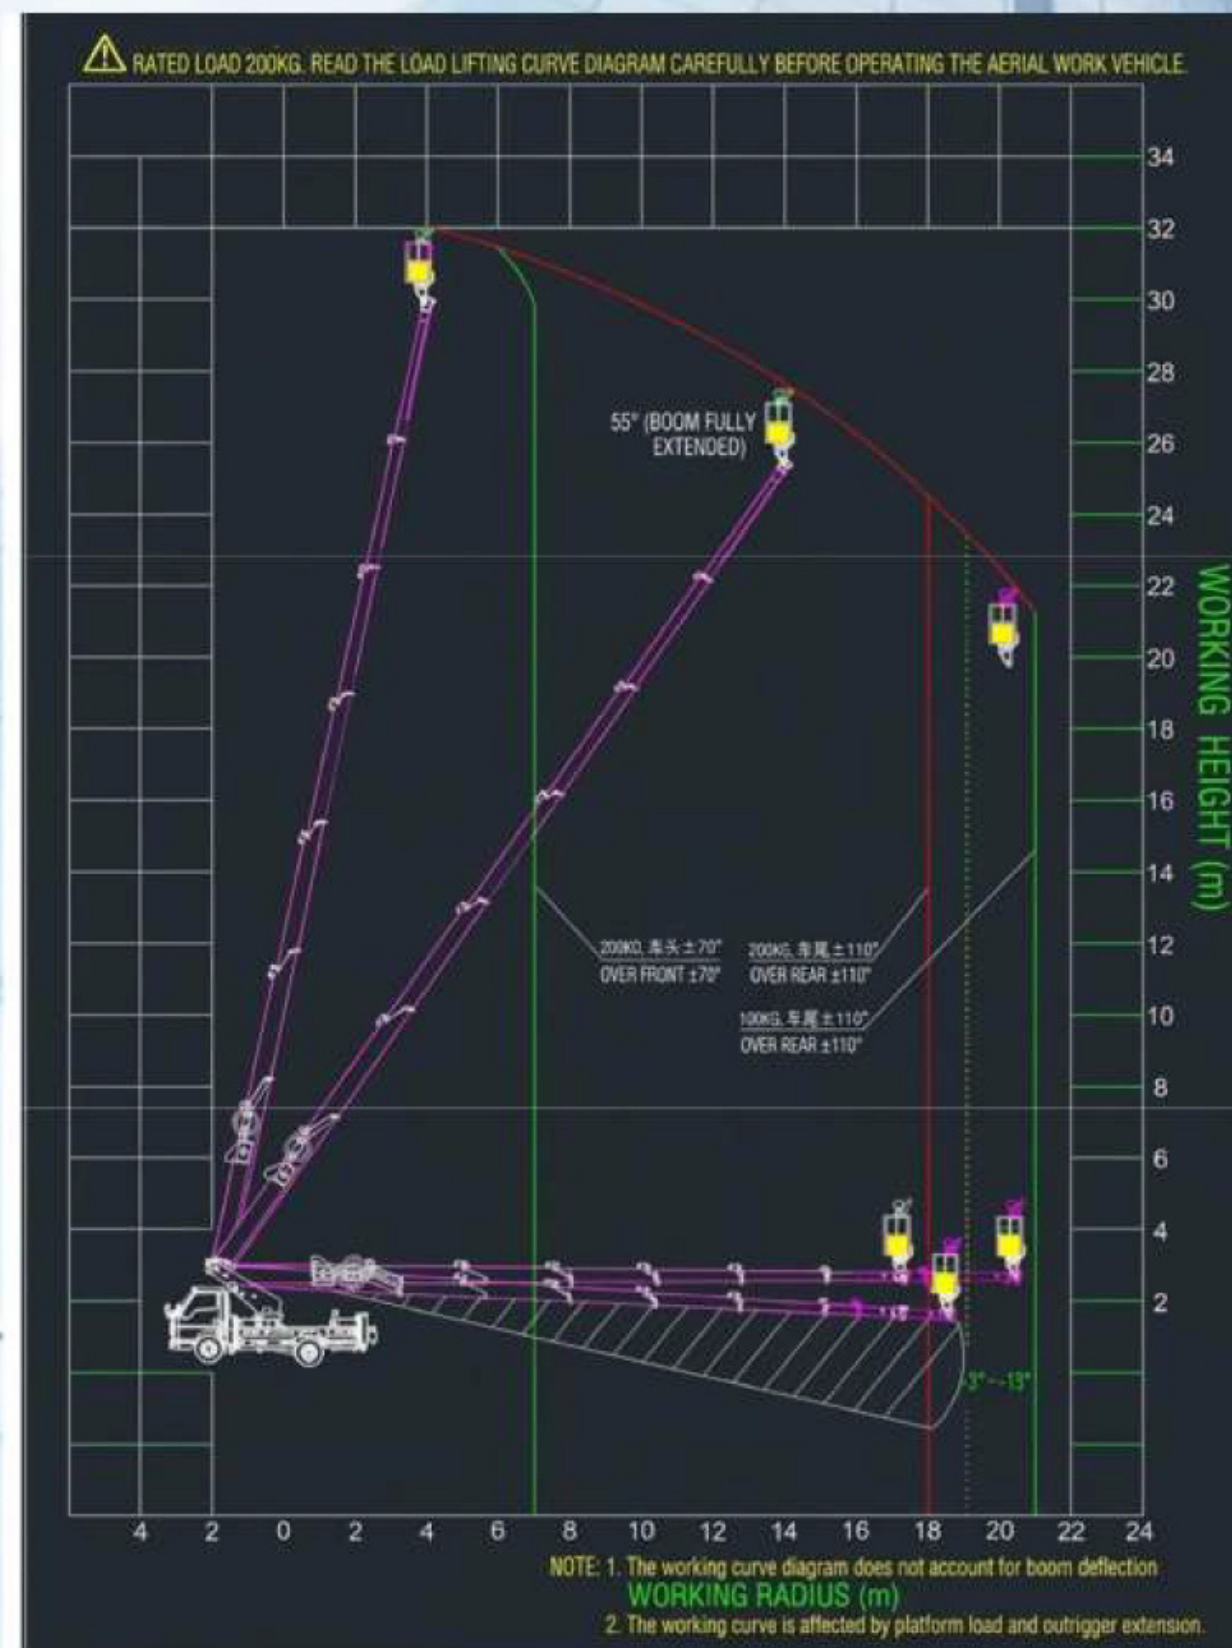

Safety & Control Features

- Real-time outrigger load monitoring with alarm for instability.
- Automatic interlock to prevent simultaneous upper and lower operation.
- Emergency electric-hydraulic pump for safe return to ground.
- Dual emergency stops devices.
- Automatic working range limiter for safe operation.
- Vehicle level monitoring system.
- Remote and turntable engine start/stop control.
- Composite movement capability.
- Emergency operation function to safely bring personnel to ground.